



Indoor unit of heat pump Tower-M/210

Tower-M/210 are intended for installation with Centrometal monobloc heat pumps with working medium R32 or R290. The Tower-M/210 unit consists of a stainless steel DHW tank, storage tank, direct heating circuit pump, regulation for Centrometal heat pumps and expansion tank for DHW.

All components are located in a compact housing with floor plan dimensions of 600×600 mm, the same space as the washing machine next to which it is usually installed in apartments, which takes up minimal space. In combination with a monobloc heat pump, this unit can replace any type of boiler or work in combination with it, in an integrated hybrid system. Tower-M/210 is a very practical and efficient solution for apartments and houses, providing optimal comfort while saving space.

PRODUCT CHARACTERISTICS



- For monobloc heat pumps with medium R32 and R290



- Working medium R32 and R290
- Expansion vessel 8 liters
- Electric heater 3/9 kW
- Controller with touchscreenn



- Accumulation tank
- One direct heating circuit (standard delivery)
- One mixing heating circuit (additional option)



- DHW tank – 210 l
- Expansion vessel – 11 liters
- Safety valve
- Electric heater – 2 kW (additional option)

CONTROLLER WITH A COLOR TOUCH SCREEN




COMPREHENSIVE SOLUTION FOR HEATING AND COOLING

- Control with a color touch screen controls the heat pump, up to two mixed heating/cooling circuits, one direct heating/cooling circuit and DHW heating (with recirculation)
- It can be connected to underfloor heating/cooling, fan coils and/or low-temperature radiator heating
- Possible subsequent connection to the web portal

CROSS-SECTION:

Indoor unit of heat pump Tower-M/210

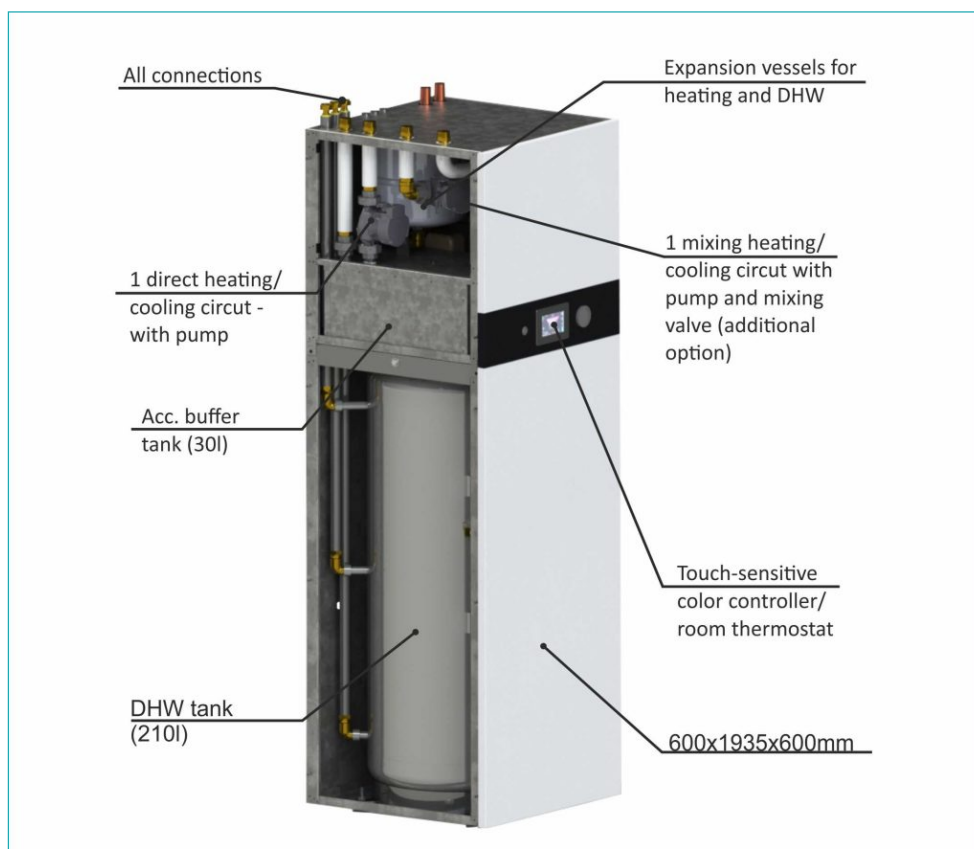

TECHNICAL DATA:

Tower-M/210			
Power supply		V/Ph/Hz	220-240/1/50
Sound power level		dB(A)	37
Dimensions (WxHxD)		mm	600x1935x600
Net/gross mass		kg	185
Water circuit	Piping connections	R	1"
	Safety valve	bar	3.0
	Buffer tank volume	l	30
	Drainage	mm	ø25
DHW	DHW tank volume	l	210
	Expansion vessel	l	11
	Connections	R	3/4"
	Safety valve	bar	6
	Electronic heater	kW	2