

Wood pellet stoves CentroPelet ZS 10



Hot water stoves CentroPelet ZV are wood pellet firing stoves intended for heating the room with air by means of a built-in fan and water through the radiator central heating. They are made of steel with modern design and high efficiency.

They have a built-in circulation pump, safety valve, pressure switch, expansion vessel and automatic vent valve. They are standardly supplied with a remote control and digital control that can be used to manage the work of the stove and select the weekly programme.

PRODUCT CHARACTERISTICS



MODERN DESIGN

These stoves with their modern lines fit perfectly into your home.



SMART FUNCTIONS

The pellets are automatically supplied by sling conveyor and burned automatically with electric heater.



WARM AIR DISTRIBUTION

The possibility of channel distribution of warm air to other rooms.



REMOTE CONTROL

Control the stove functions from the comfort of the armchair with the intuitive remote control.



- Pellet firing stove for hot air heating by blowing hot air into the space.
- Possibility of line distribution of hot air to other rooms. Two lines on the rear side of the stove can be connected to other rooms by tubes. The total maximum length of the line is 4m.
- It is possible to manually control how much air is distributed into the room, and how much by lines.
- It is available in three colours: white, gray, red.
- The stove is supplied with wood pellets using a screw conveyor, and the pellets are fired by an electric heater.
- The stove can be turned on/off automatically.
- The function of economical operation allows automatic output reduction when the temperature room is getting closer to default.
- The possibility of adjusting the switching time using the remote control.
- Additionally you can order a Wi-Fi module (ECO V9) which enables monitoring the temperature and controlling the stove operation by a mobile application.
- Built-in pellet tank.

BASIC DIMENSIONS:

- 1 Regulation
- 2 Main switch

- 3 Connection for flue gas exhaust
- 4 Connection for fresh air intake

- 5 Pellet tank



CentroPelet ZS 10


ZS 10

Heat output	kW	2,92-9,01
Pellet consume	kg/h	0,62-1,98
Efficiency	%	92,66-95,93
Flue gas tube connection	Ø mm	80
Tank capacity	kg	17
Autonomy	h	11-24
Power consume at nominal power	W	100
Dimensions (w/d/h)	mm	935*280*935
Dimensions for boiler planning	m ²	0,785
Net weight	kg	100


DELIVERY AND OBLIGATORY ADDITIONAL EQUIPMENT:



Delivery:
Stove with the regulation control in cardboard packaging

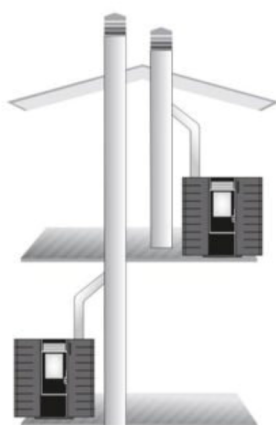

Flue gas exhaust:
One stove per one chimney

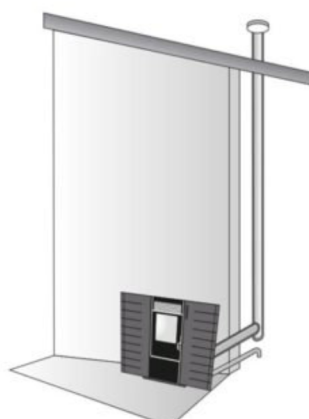

Flue gas exhaust:
External flue pipes that should be connected in accordance with the local regulation.



Additional equipment:
set of flue pipes for CentroPelet ZS for the façade connection (1m flue pipe, 0.5m flue pipe, T- piece cover, T-piece, silicon rosette, 90° bend, 0.25m flue pipe, 45° bend)